

Monocrystalline PERC Solar Module



CPV-SP-SHG-F296-xxxW (xxx=300-310)

ELECTRICAL CHARACTERISTICS | STC*CPV-SP-SHG-F296-300W to 310W

Nominal Power Watt Pmax(W)* with tolerance ±5%	300	305	310
Power Sorting	0-5W		
Maximum Power Voltage Vmp(V)	42.76	42.88	43.00
Maximum Power Current Imp(A)	7.03	7.12	7.21
Open Circuit Voltage Voc(V) with tolerance ±3%	50.50	50.62	50.74
Short Circuit Current Isc(A) with tolerance ±3%	7.56	7.64	7.72
Module Efficiency (%)	16.66	16.94	17.22

*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25°C, AM 1.5

DIMENSIONS(MM)

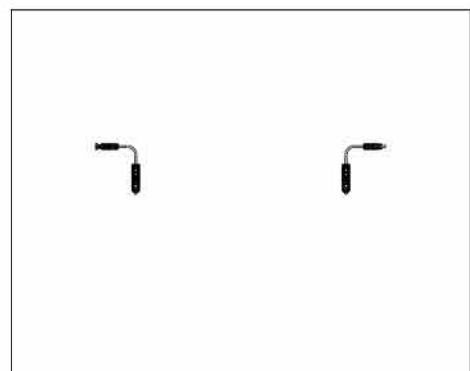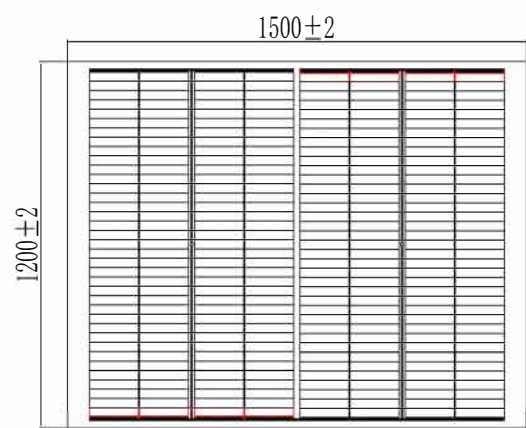

ELECTRICAL CHARACTERISTICS | NMOT*

Maximum Power Pmax(Wp)	225	229	233
Maximum Power Voltage Vmpp(V)	40.78	40.89	41.02
Maximum Power Current Impp(A)	5.54	5.61	5.68
Open Circuit Voltage Voc(V)	48.19	48.30	48.42
Short Circuit Current Isc(A)	6.08	6.14	6.21

*NMOT (Test Condition): Irradiance 800W/m², cell Temperature 20°C, AM 1.5 wind speed 1m/s.

MECHANICAL DATA

Solar cells	P Type Monocrystalline Cell
Cells orientation	296 (8×37)
Module dimension	1500x1200x14mm
Weight	56.5kg
Front Glass/Rear Glass	6.0+6.0mm High Transmission Tempered Glass
Junction box	IP 68, 2 diodes
Cables	4 mm² ,±300 mm,length can be customized
PV Connector	Zhonghuan:PV-ZH202B; Staubli: PV-KST4-EVO 2/xy_UR, PV-KBT4-EVO 2/xy_UR, PV-KST4-EVO2A/xy, PV-KBT4-EVO2Axxy

TEMPERATURE RATINGS

WORKING CONDITIONS

NMOT	45°C ±2°C	Maximum system voltage	1000 V DC
Temperature coefficient of Pmax	-0.34%/°C	Operating temperature¹	T98max= 70degC
Temperature coefficient of Voc	-0.27%/°C	Maximum series fuse	15A
Temperature coefficient of Isc	+0.045%/°C	Maximum test load	+5400 Pa / -2400 Pa

¹Do not connect Fuse in Combiner Box with two or more strings in parallel connection
¹Remark:Electrical data in this catalog do not refer to a single module and they are not part of the other.They only serve for comparison among different module types.
¹Operating Temperature In accordance with the requirements of IEC 61215-1 for photovoltaic (PV) modules.

PACKAGING CONFIGURATION

Piece/Pallet	25
Piece/Container(40HQ)	350
Piece/Container(with additional small package)	/


FIRE RATING

Fire safety class according to UL Class A

WARRANTY

12 years product warranty
30 years performance warranty

I-V CURVES OF PV MODULE

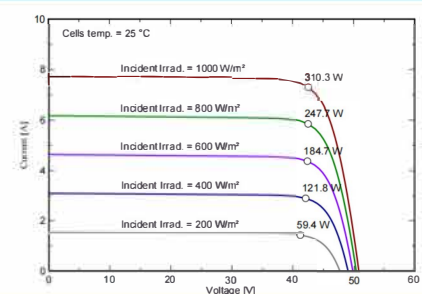

P-V CURVES OF PV MODULE

